

UL 1430


交联PVC线 XLPVC wire

■ 技术参数 Specifications

额定电压(Nominal voltage): 300V
额定温度(Temperature range): 105°C
标准(Standard): UL758

■ 应用 Applications

电器、电子设备内部配线。
Internal wiring of electronic equipment.

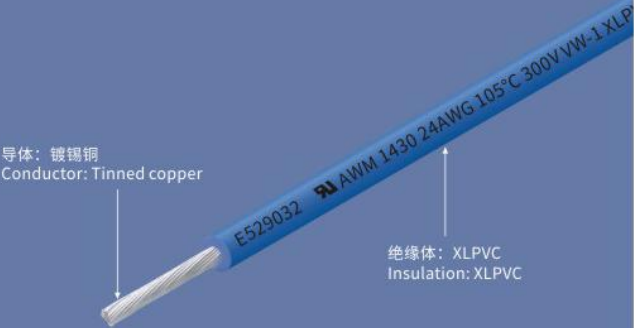

■ 印字 Marking

E529032  AWM 1430 24AWG 105°C 300V VW-1 XLPVC  AWM I A/B 105°C 300V FT1 ZHONGWEI

■ 规格值 Product dimensions

导体 Conductor			绝缘体 Insulation	完成外径 Diameter (mm)	导体电阻 Max.cond Resistance (Ω/KM)	包装 Unit Length (M/FT)
线规 Size (AWG)	线数/线径 Construction (No./mm)	直径 Diameter (mm)	绝缘厚度 Nominal Thickness (mm)			
30	1/0.254	0.25	0.38	1.05	381	610/2000
30	7/0.10	0.30	0.38	1.10	381	610/2000
28	1/0.32	0.32	0.38	1.10	239	610/2000
28	7/0.127	0.38	0.38	1.20	239	610/2000
26	1/0.404	0.40	0.38	1.25	150	610/2000
26	7/0.16	0.48	0.38	1.30	150	610/2000
24	1/0.511	0.51	0.38	1.35	94.2	610/2000
24	11/0.16	0.61	0.38	1.40	94.2	610/2000
24	7/0.20	0.60	0.38	1.40	94.2	610/2000
22	1/0.643	0.64	0.38	1.50	59.4	610/2000
22	17/0.16	0.76	0.38	1.60	59.4	610/2000
22	7/0.254	0.76	0.38	1.60	59.4	610/2000
20	1/0.813	0.81	0.38	1.65	36.7	610/2000
20	26/0.16	0.94	0.38	1.80	36.7	610/2000
20	7/0.32	0.96	0.38	1.80	36.7	610/2000
18	1/1.024	1.02	0.38	1.85	23.2	610/2000
18	41/0.16	1.18	0.38	2.10	23.2	610/2000
18	7/0.404	1.20	0.38	2.10	23.2	610/2000
16	1/1.29	1.29	0.38	2.20	14.6	610/2000
16	26/0.254	1.49	0.38	2.40	14.6	610/2000

■ 颜色 Colours : All colours